



di Ing. Sergio Serrano & C.

ELECTROMEDICAL EQUIPMENT – NATURAL PRODUCTS

VIA RONCHI, 30 – 20134 – MILAN (I) - tel. +39 02 21597558 - fax +39 02 21597559 - E. MAIL: zener@zener-seab.it



Ionic Allotropic Oxygen Therapy (IAOT)

IAOT generates two different types of allotropic oxygen made up of a mixture of different doses of IONIC OXYGEN and POLARIZED OZONE OXYGEN, starting from the medical oxygen contained in a cylinder. Polarized allotropic oxygen is much more effective in treatment therapies because its molecules contain natural binding agents: it is a low entropy gas.

Therapies applying polarized allotropic oxygen are used, with different therapeutic patterns, for treatment in the fields of:

- Bioenergy Medicine • Revitalizing Therapy • Aesthetic Medicine • Pain Therapy • Sports Medicine
- Orthopedics • Dermatology

The two gases which go to make up the Polarized Allotropic Oxygen.


Polarized Ionic Oxygen (made up of oxygen negatively ionized and SINGOLETTI) plays an important role in the Organism by transferring electromagnetic energy (Biophontons) to the metabolic processes. Polarized Ionic oxygen offers the Organism the chance to normalise or to reduce those alterations in the catalyst chain by working on the metabolic alterations through important revitalization properties and stimulation of the healing processes of the Organism.

Polarized Ozone contains interesting anti-infective/sterilizing properties, immunostimulators, analgesics and Lipolytics.

TECHNICAL FEATURES

- concentrations of POLARIZED IONIC OXYGEN (OSP) : 100-11.500 negative ions/cc
- concentrations of POLARIZED OZONE (O3P): 5 - 80 μ geq/cc
- regulating concentrations OSP and O3P
- selecting (optical alarm): IONIC OXYGEN P/ OZONE/P
- flowmeter to test and regulate gas leaks
- disconnectable electronic timer
- electric valve driven manually or by timer
- power supply: 220 volt
- absorption: 40 VA
- size: 54 x 35 x 19 cm
- weight: 15 Kg

This apparatus is not a medical device and is in full compliance with current safety rules and regulations.

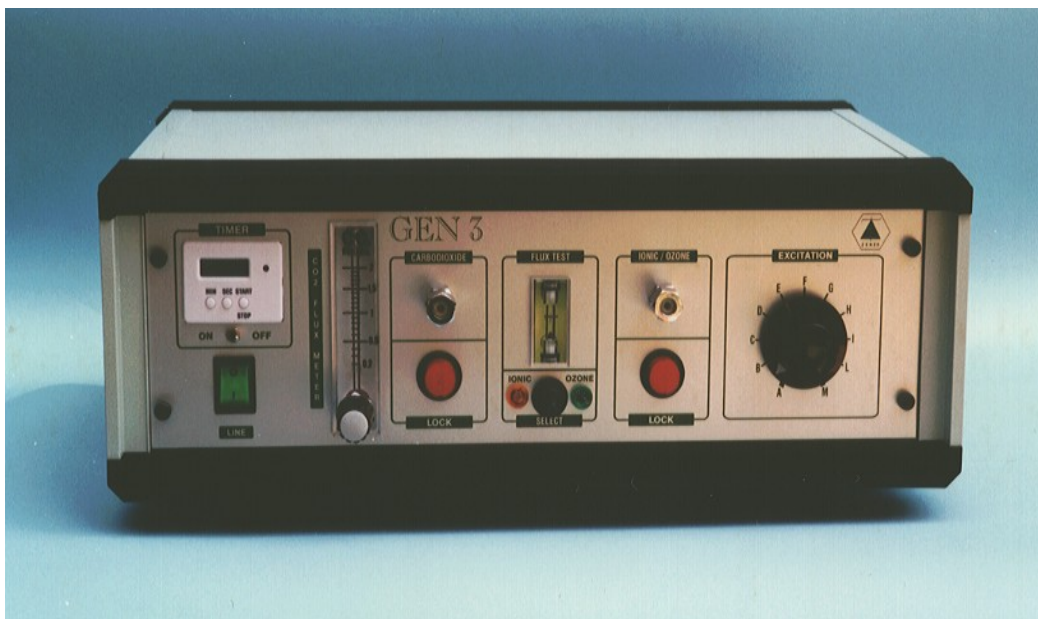

GEN3

GEN3 supplies selective concentrations of POLARIZED IONIC OXYGEN, POLARIZED OXYGEN-OZONE and programmed quantities of CARBON DIOXIDE beginning with the medical oxygen and carbon dioxide contained two cylinders attached to the device.

POLARIZED IONIC OXYGEN, POLARIZED OZONE OXYGEN and CARBON DIOXIDE have all got a synergic action and are used, with different therapeutic patterns, for treatment in the fields of:

- Bioenergy Medicine • Revitalizing Therapy • Aesthetic Medicine • Pain Therapy • Phlebology
- Sports Medicine • Orthopedics • Dermatology

- **Polarized Ionic Oxygen** (made up of oxygen negatively ionized and SINGOLETTO) plays an important role in the Organism by transferring electromagnetic energy (Biophontons) to the metabolic processes. Polarized ionic oxygen offers the Organism the chance to normalise or to reduce those alterations in the catalyst chain by working on the metabolic alterations through important revitalization properties and stimulation of the healing processes of the Organism.

- **Polarized Ozone** contains interesting anti-infective/sterilizing properties, immunostimulators, analgesics and Lipolytics.

- **Carbon Dioxide** in tissues causes

- 1) Vasodilatation and the release of locking devices which regulate the microcircular flow.

- 2) Reduction of the homoglobin affinity for oxygen with a consequent rise in the bioavailability of the oxygen itself towards the metabolic processes.

The carboxy therapy has a clear and trial tested pharmacodynamic effect, it does not carry any side effects, it has a local action (it does not pass, for example, from vein to artery) and it does not require catabolic interventions of organ draining (with the consequent risk of hepatonephrotoxicity) .

TECHNICAL FEATURES

concentrations of IONIC OXYGEN: 100-11.500 negative ions/cc

concentrations of OZONE P (O3): 5 - 80 µgeq/cc

regulation of concentrations OSP e O3P

setting CO2 amount/flow

selecting gas to supply (with optical alarm): Ionic oxygen and polarized ozone/carbon dioxide

molecular filters to treat gas in the cylinders

flowmeter to test and regulate gas leaks

disconnectable electronic timer

electric valve driven manually or by timer

power supply: 220 volt

absorption: 40 VA

size: 54 x 35 x 19 cm

weight: 15 Kg

This apparatus is not a medical device and is in full compliance with current safety rules and regulations .